


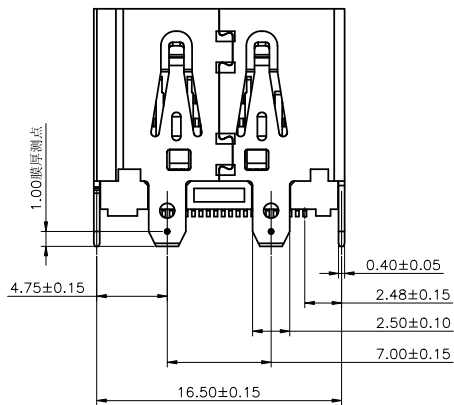
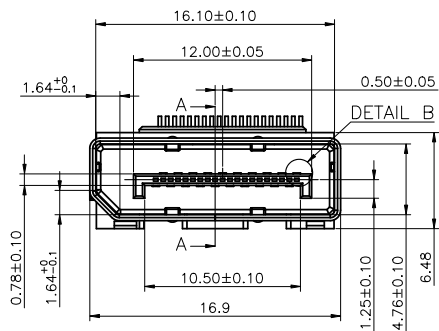
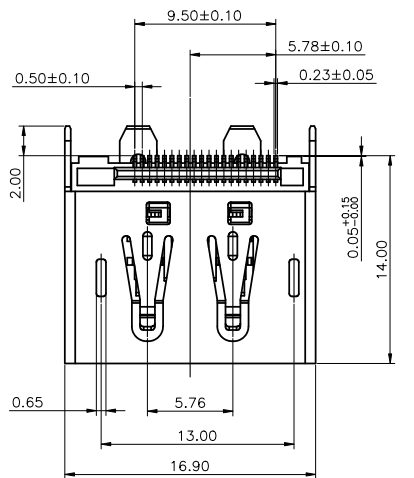




ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	LCP	Black
2	CONTACT	20	C2680	Gold Flash on contact area, Tin:80u" on solder area under 50u" Nickle
3	SHELL	1	S50C	Ni:50u"Min

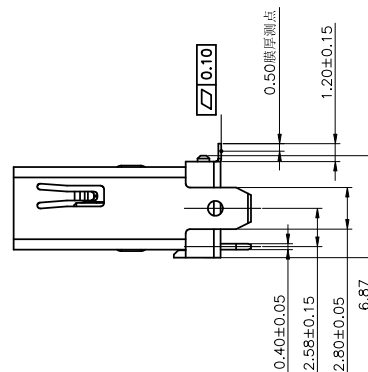

SECTION A-A

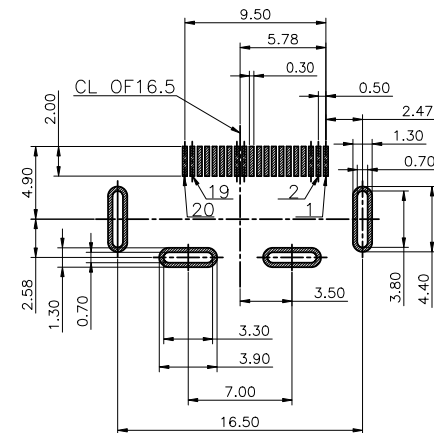


RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCE: ±0.05

SPECIFICATION


- CURRENT RATING : 0.5 A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S.
FOR ONE MINUTE.
- INSULATION RESISTANCE : 100M OHMS MIN.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -20°C TO +85°C.
- INSERTION FORCE : 4.5kgf MAX.
- EXTRACTION FORCE : 1.0~4.0kgf MIN.
- SALT SPRAY : 24 HOURS PASS.
- REFLOW SOLDERING(SMD COMPONENT) OVEN
- TEMPERATURE:260°C.5SEC

11.PART NO.


SERIES D 04 - C 124 - 020 01
D=I/O Connector
CONN TYPE NO. 04=type 4
FORM OF FACTORY C=Connector of factory
TYPE NO.
01=Type 1
CONTACT NUMBER
020=20 position
FACTORY CODE



A		REVISIONS	zhijun		2022/8/15	UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差 X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±5°00'	CHECKED 審核	DESIGNED 設計 zhijun 2022/8/15	UNIT 單位 MM	TITLE 產品名稱 DP180度SMT14.0高 腳長2.0	1/2
REV. 版本	ECN NO. 設變號碼	MARK 記號	SIGN 修改		DATE 日期		APPROVED 承認	DRAWN 製圖 zhijun 2022/8/15	SCALE 比例 1/1	PART NO. 產品料號 D04-C124-02001	REV. 版本 A

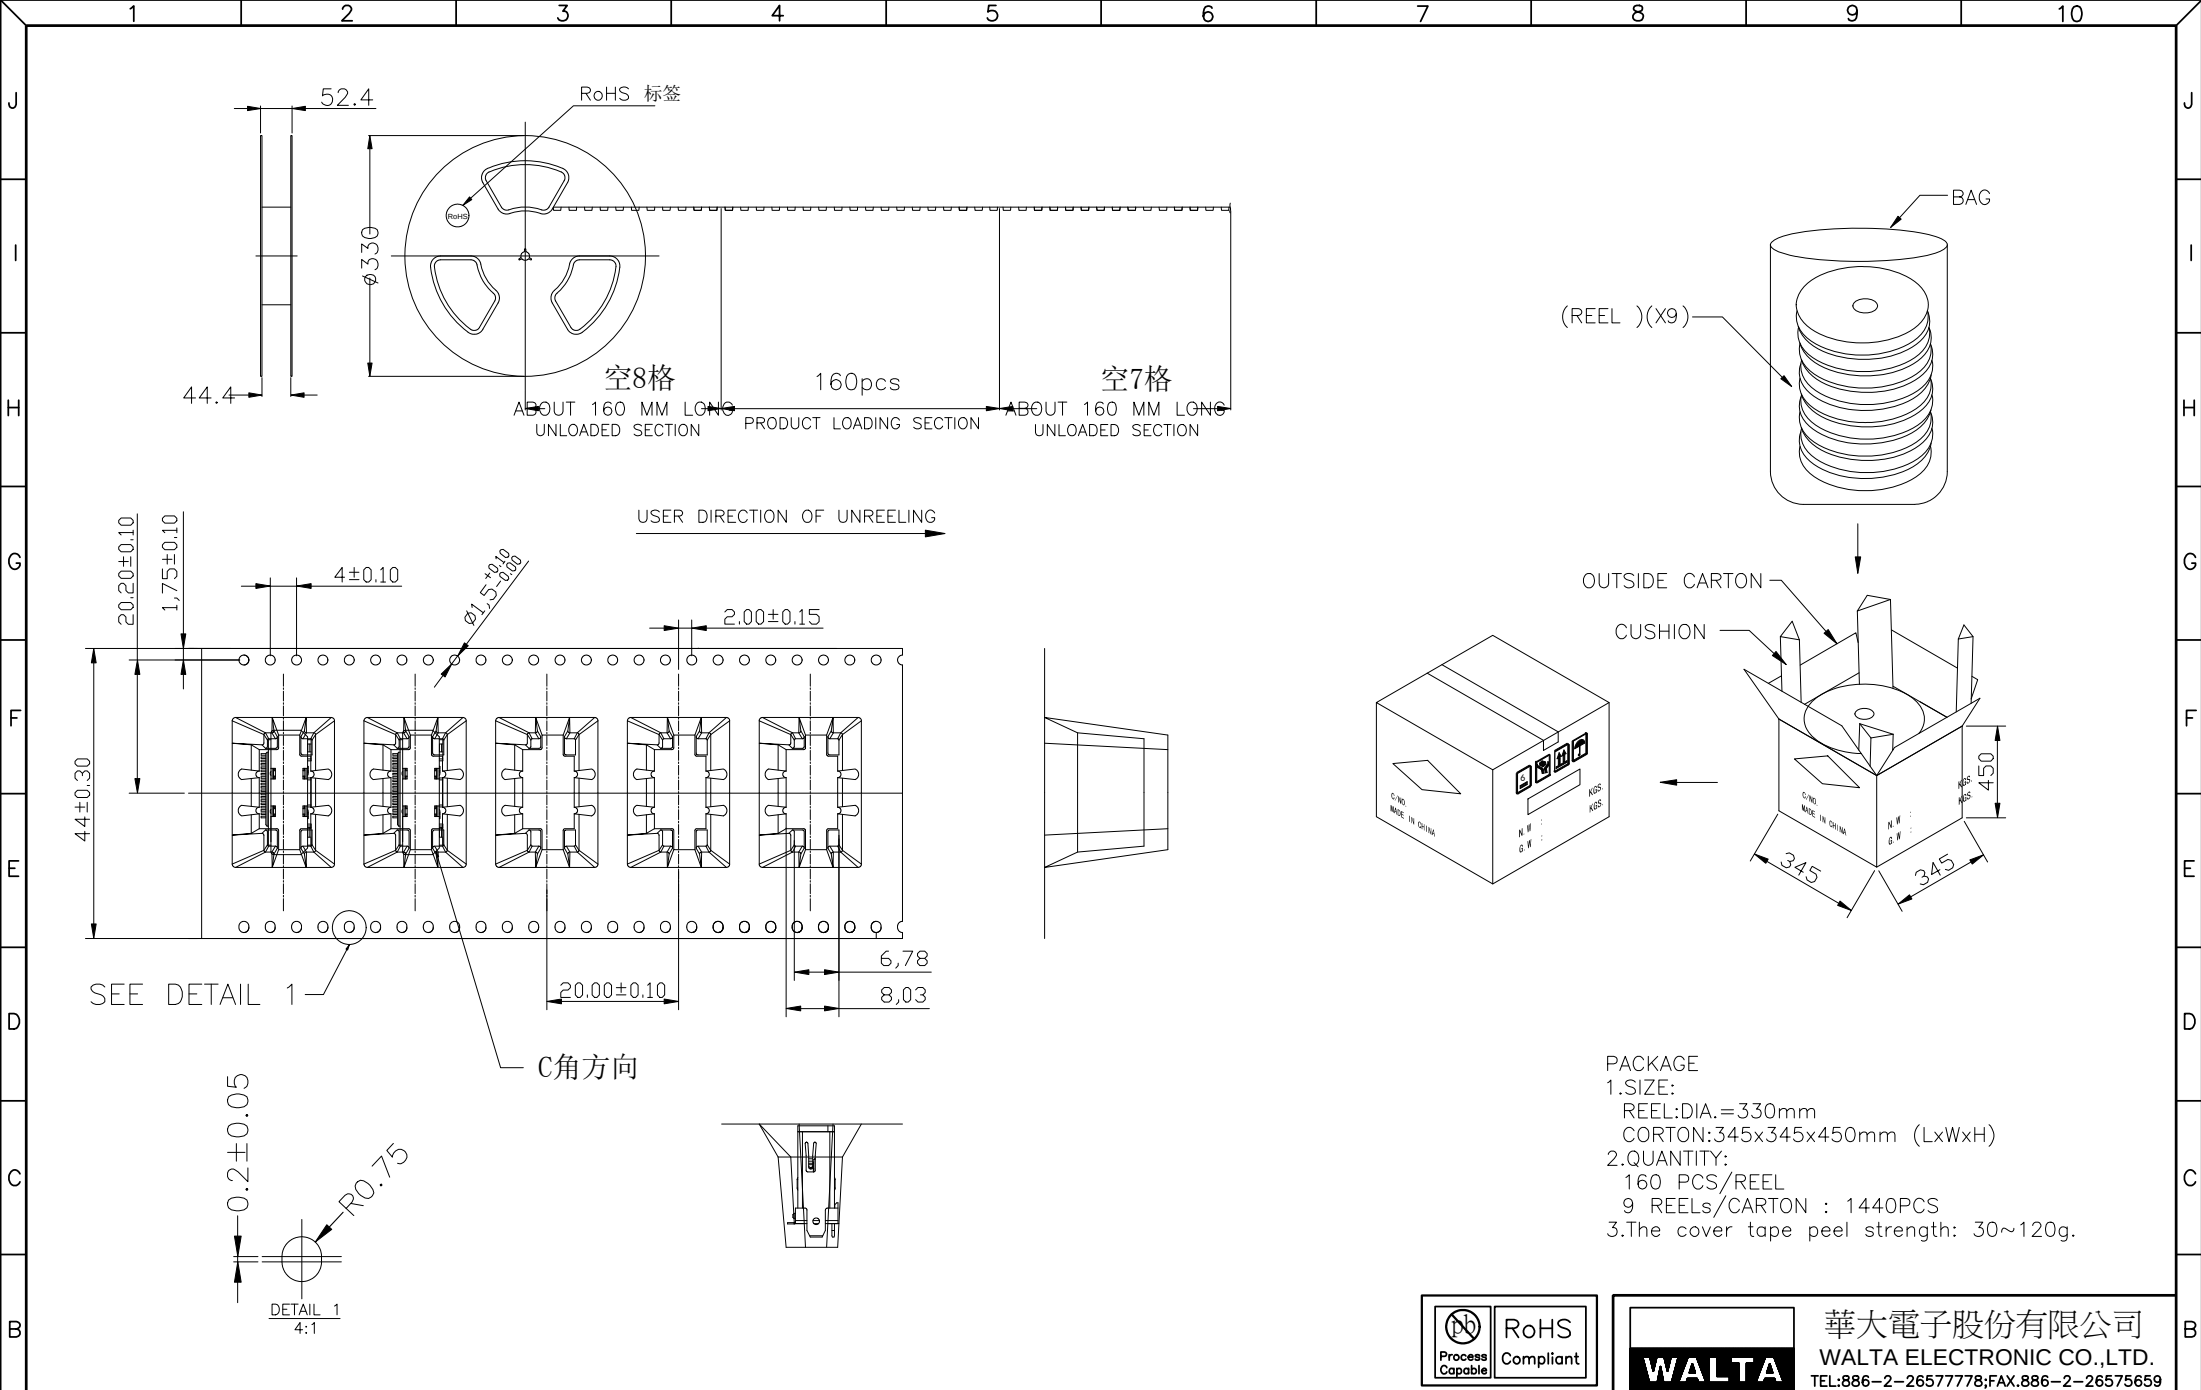

A							UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差 X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±5°00'	CHECKED 審核	DESIGNED 設計 zhijun 2022/8/15	 TITLE 產品名稱 DP180度SMT14.0高 脚长2.0 2/2	A								
								UNIT 單位 MM	PART NO. 產品料號 D04-C124-02001	REV. 版本									
	A	EXXXX-XXX	 X 0	-		zhijun		2022/8/15	DRAWN 製圖 zhijun 2022/8/15	SCALE 比例 1/1		DOC. NO. 文件編號 CUT-C124-007	A						
	REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容				SIGN 修改	DATE 日期										
1		2		3		4		5		6		7		8		9		10	



華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL:886-2-26577778;FAX:886-2-26575659