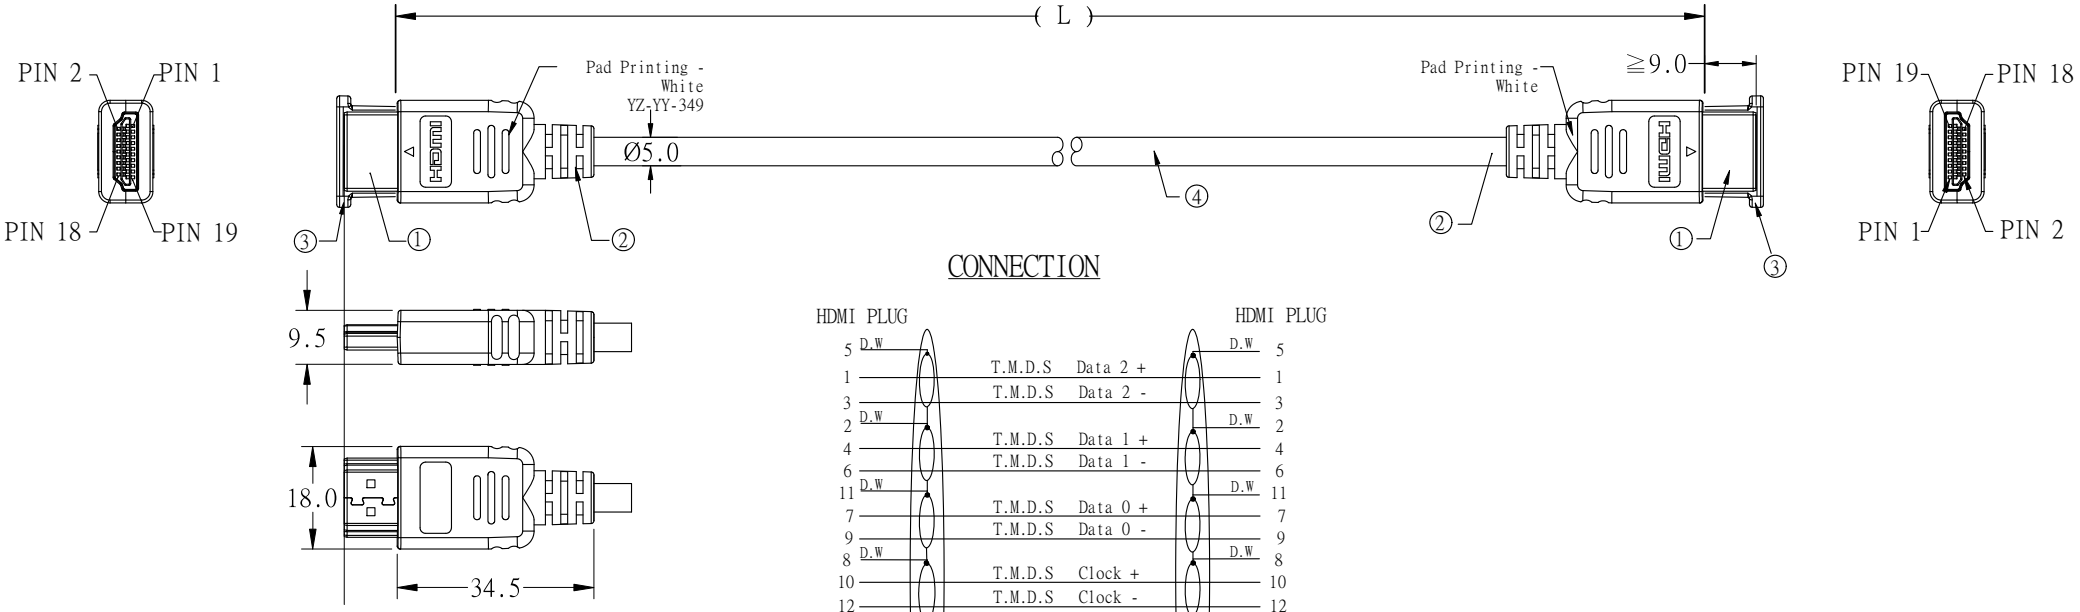


CONNECTION

ELECTRIC TESTING

NO	PARAMTER	TEST CONDITIONS
1	Open&Short	100 %
2	Insulation Resistance	20MΩ
3	Conductor Resistance	≦3Ω
4	Voltage	300V DC / 0.1s
5	Function Test	8K / 60Hz

ITEM	SAP NO	SPECIFICATION	MODEL
4	30718910150000Q	{[(1/0.203Bc+PE)*1P+1/0.203Tc+AL/Mylar+Myalar]*5+ (1/0.203Bc+PE)*4C+Cotton+AL/Mylar+16/11/0.08Tc 85%}*1C OD=5.0±0.15mm Jacket=Black PVC with White Text: HIGH SPEED HDMI R(logo) CABLE E81280-D UL(Logo) AWM 20276 80℃ 30V VW-1	/
3	2312110024	Plastic Cap-Transparent	/
2	31401012060	PVC - Black 60P	/
1	3033700*G01 3033700*N04 3033700*N05	HDMI A Plug - Gold Plated(Pin 3u" Gold)	YT-4229 YT-4169

Pb Process Capable | RoHS Compliant

WALTA 華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL:886-2-26577778;FAX.886-2-26575659

REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容	SIGN 修改	DATE 日期
A	EXXXX-XXX	⚠ X 0	–	zhijun	2024/7/10

UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差
X. ±1
.X ±0.50
.XX ±0.30
ANG. ±5°00'

CHECKED 審核
APPROVED 承認
DESIGNED 設計 zhijun 2024/7/10
DRAWN 製圖 zhijun 2024/7/10

UNIT 單位 MM
SCALE 比例 1/1
SIZE 尺寸 A4

TITLE 產品名稱: DP/M to DP/M Cable 32# Black
PART NO. 產品料號: H01-W129-00001
REV. 版本: A
DOC. NO. 文件編號: CUT-W129-XXX