


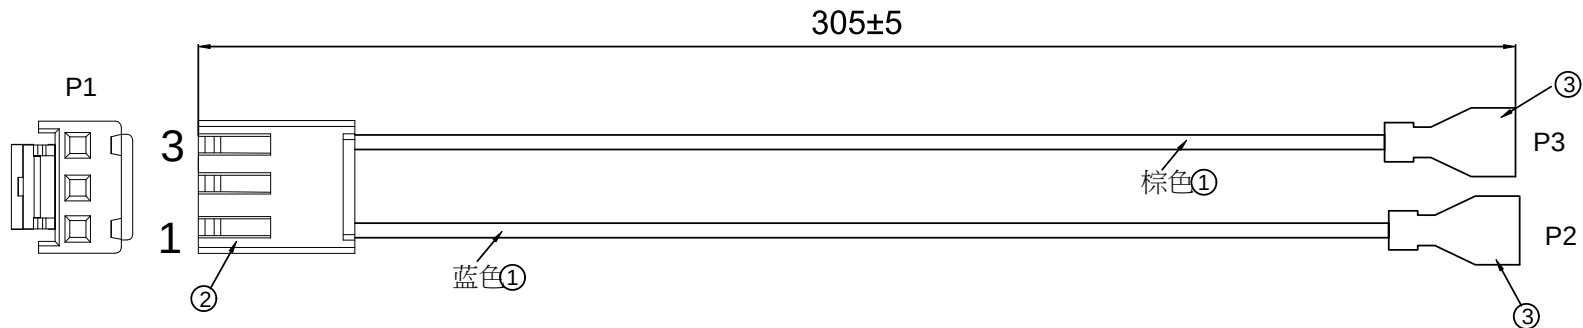

PIN ASSIGNMENT:


P1	P2	P3
1 ——— 蓝色 ——— 冷压端子		
3 ——— 棕色 ——— 冷压端子		

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
①	CABLE	UL1007 18AWG OD2.05MM (蓝色，棕色)		
②		VH3.96 3P HSG+端子镀锡		
③		187单粒绝缘端子 (0.8)		

NOTES:

- 100% OPEN & SHORT TEST
- CONDUCTIVE RESISTANCE : 5 Ohms MAX
- INSULATION RESISTANCE : 5M Ohms MIN
- HI-POT:300V DC/10ms
- The product is ROHS compliant.



						UNLESS OTHERWISE SPECIFIED 尺寸公差	CHECKED 審核	DESIGNED 設計 zhijun 2023/7/11	 TITLE 產品名稱 VH3.96 3P HSG TO 187单粒端子0.35M
						X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±5°00'	APPROVED 承認	DRAWN 製圖 zhijun 2023/7/11	
A	EXXXX-XXX	 X 0	-		zhijun	2023/7/11			PART NO. 產品料號 A34-W093-00001 REV. 版本 A
REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容		SIGN 修改	DATE 日期			DOC. NO. 文件編號 CUT-W093-XXX