




- NOTES:
1. MATERIAL:
 - 1.1 HOUSING: SEE P/N,UL94 V-0, COLOR: SEE P/N.
 - 1.2 SPACER: SEE P/N,UL94 V-0, COLOR: SEE P/N
 - 1.3 CONTACTS: COPPER ALLOY
 - 1.4 BOARD LOCK: SPCC
 - 1.5 SCREW:STEEL
 2. PLATING:
 - 2.1 CONTACTS:
 - CONTACT AREA: GOLD FLASH PLATED
 - SOLDER TAIL: 80u" min TIN PLATED
 - UNDER PLATED: 50u" min NICKEL PLATED
 - 2.2 SHELL:NICKEL PLATED
 - 2.3 BOARDLOCKS:TIN PLATED
 - 2.4 SCREW: NICKEL PLATED
 3. SPECIFICATION:
 - 3.1 CONTACT CURRENT RATING: 1.0 Amp
 - 3.2 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V r.m.s.
 - 3.3 INSULATION RESISTANCE: 1000MΩ MIN. at DC 500V
 - 3.4 OPERATING TEMPERATURE: -40°C to +85°C
 - 3.5 CONTACT RESISTANCE: 30 MΩ MAX.

A							UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差 X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±5°00'	CHECKED 審核	DESIGNED 設計 zhijun 2025/8/29		TITLE 產品名稱 D-SUB 15F 3.08 WITHSCREW				A				
											UNIT 單位 MM								
	A	EXXXX-XXX	 X 0	-		zhijun					2025/8/29	APPROVED 承認	DRAWN 製圖 zhijun 2025/8/29	SCALE 比例 1/1		PART NO. 產品料號 D01-C124-15001	REV. 版本		
	REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容		SIGN 修改					DATE 日期			SIZE 尺寸 A4		DOC. NO. 文件編號 CUT-C124-XXX	A		
1		2		3		4		5		6		7		8		9		10	

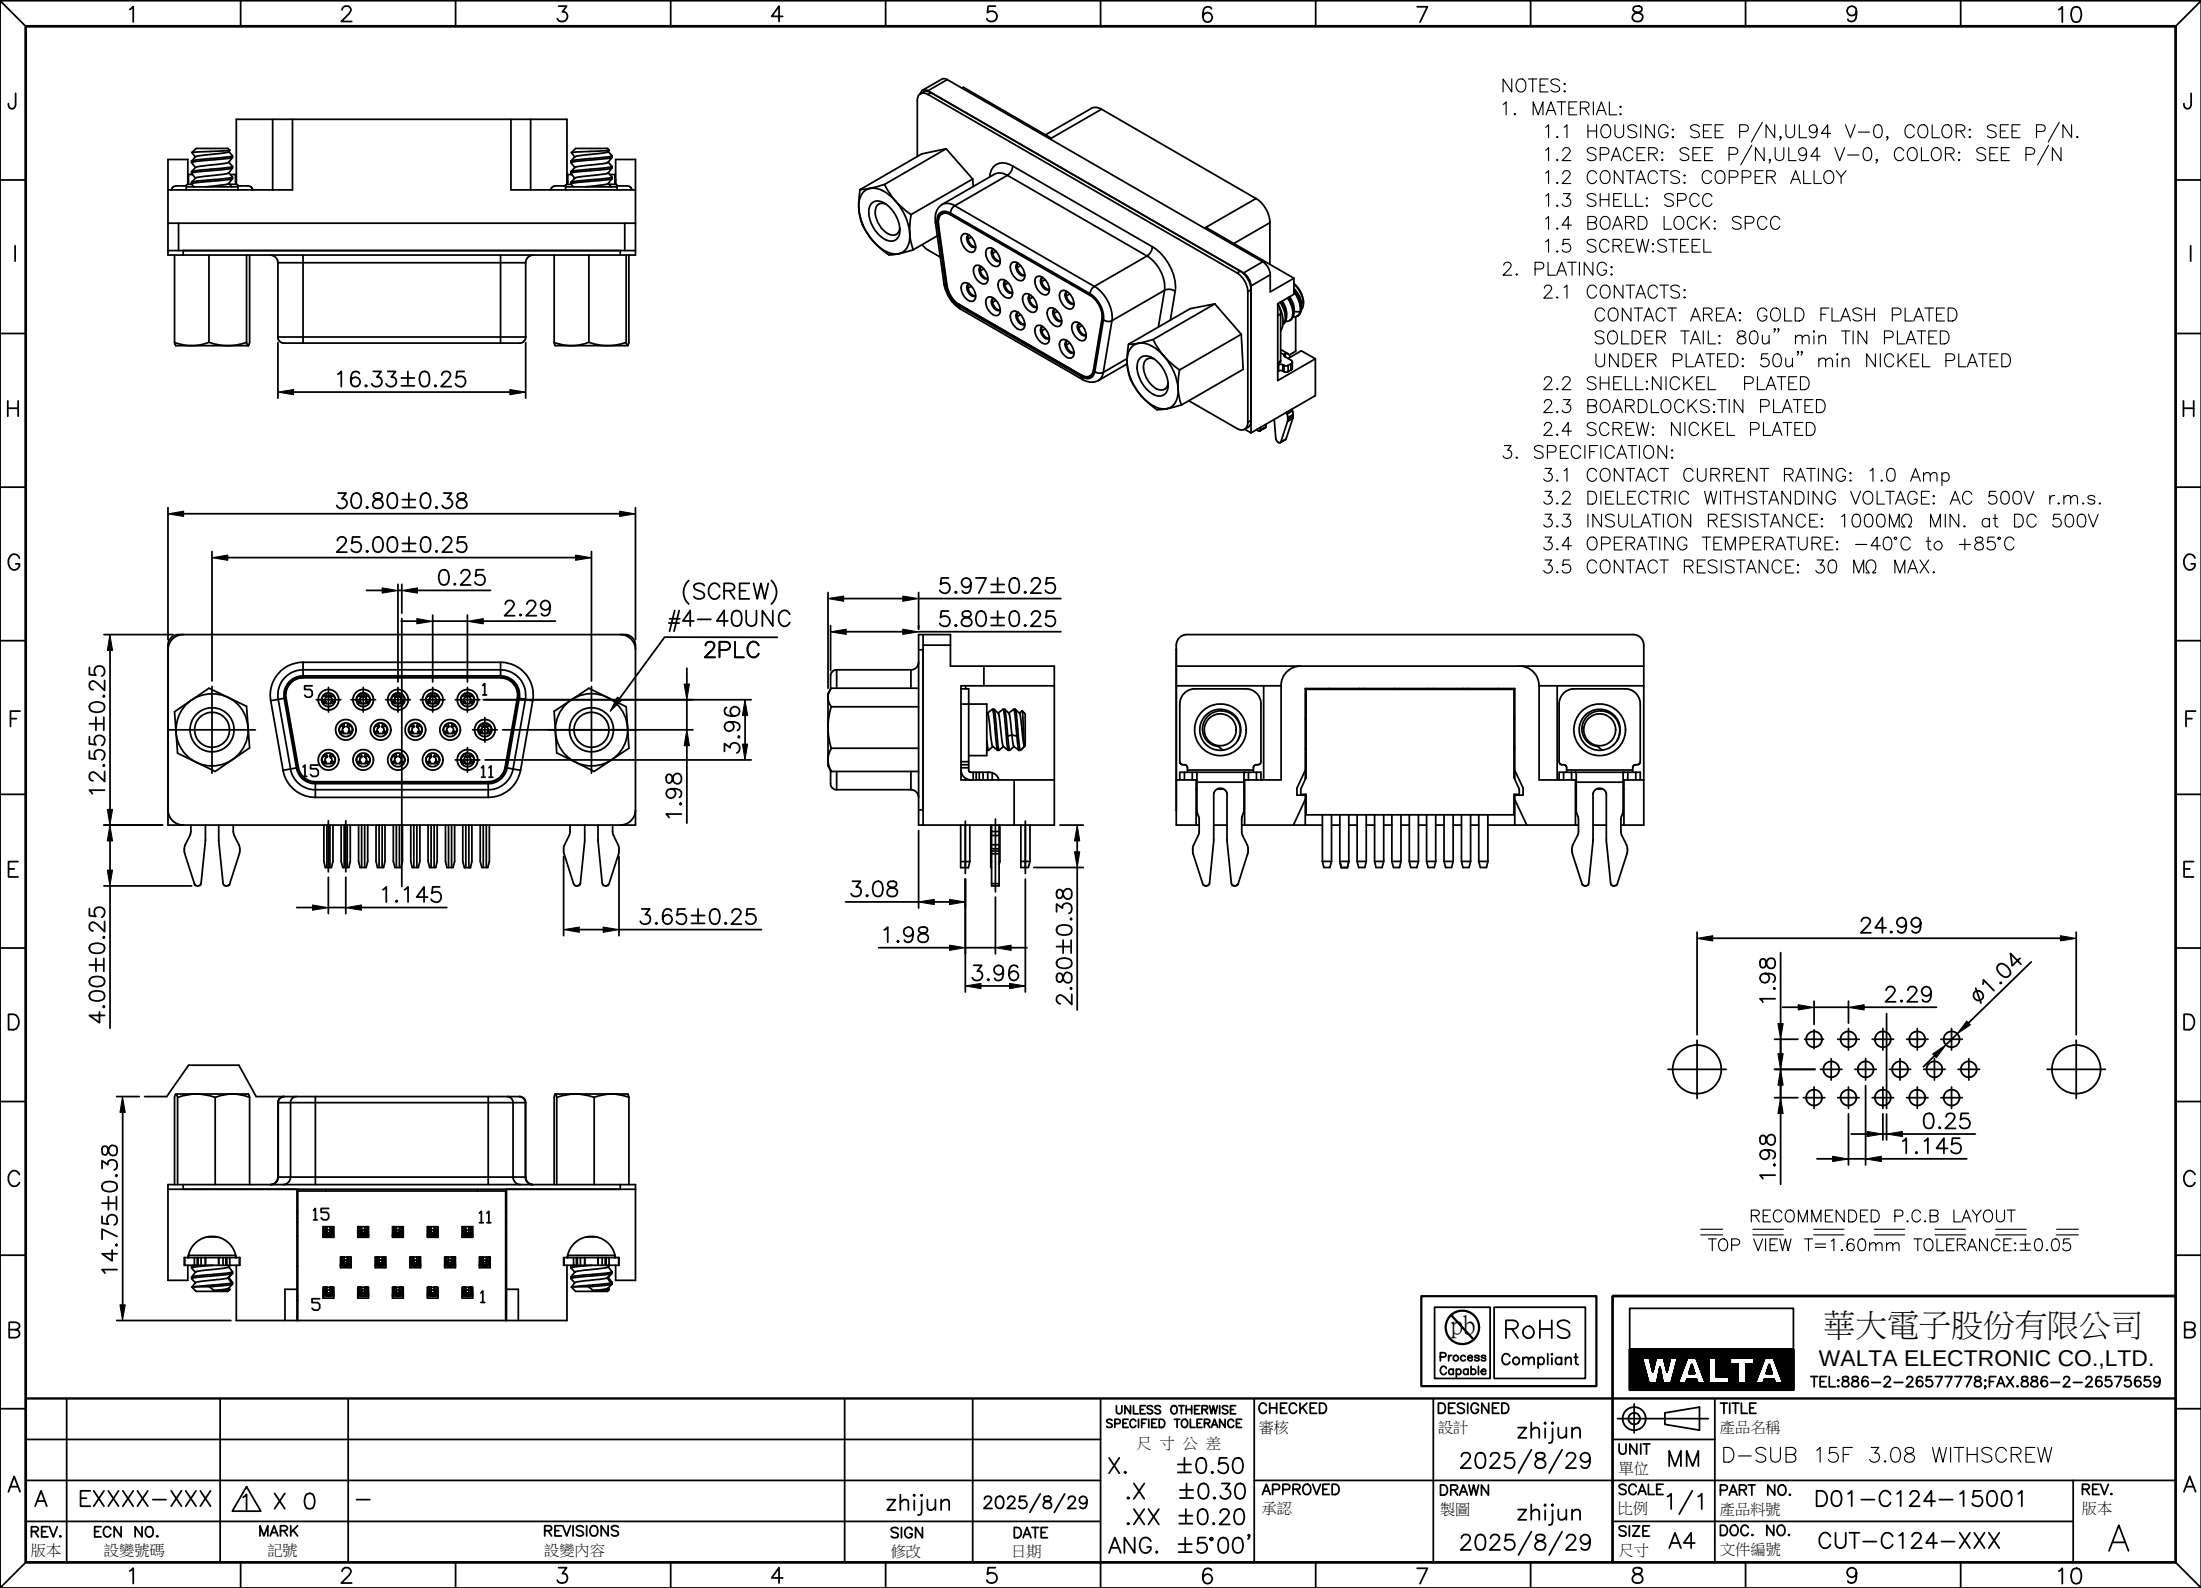

WALTA 華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL:886-2-26577778;FAX:886-2-26575659