
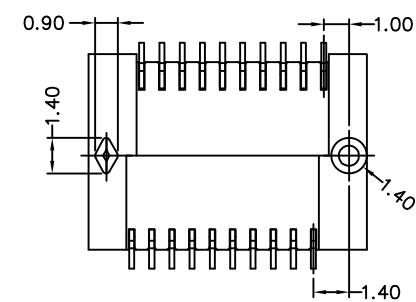
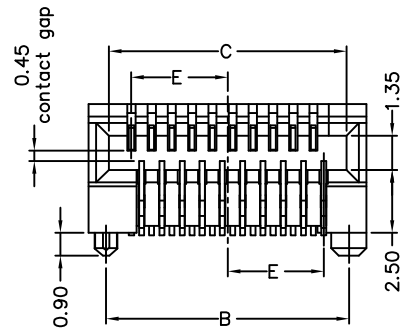
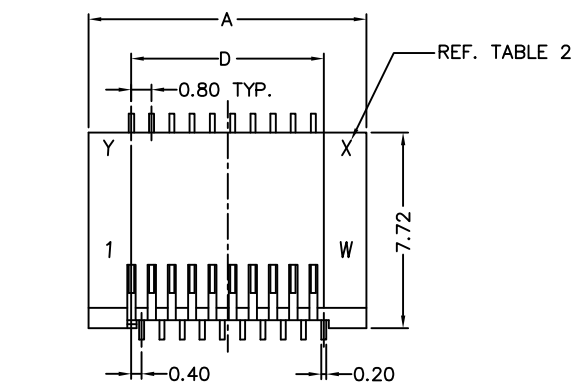


TABLE 1					
NO. POS.	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E
20	11.00	9.60	9.40	7.60	3.80

TABLE 2					
NO. POS.	W	X	Y		
20	10	11	20		

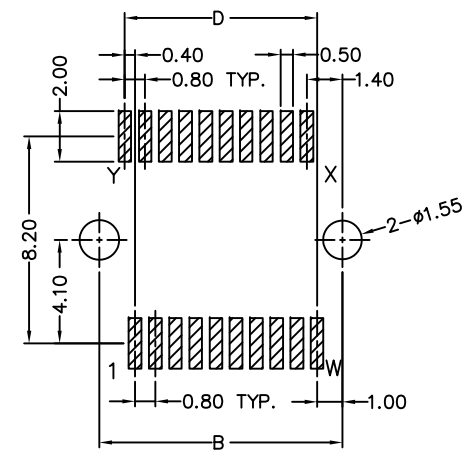

P.C.B LAYOUT
TOP VIEW ±0.05

NOTES:

1.MATERIAL:

HOUSING: HI-TEMP PLASTIC, UL94V-0, BLACK
CONTACT: PHOSPHOR BRONZE

2.FINISH:

CONTACT:

CONTACT AREA: 15u" GOLD PLATED
SOLDER AREA: TIN PLATED
UNDER PLATING: G/F GOLD PLATED

3.SPECIFICATION:

CURRENT RATING: 1A MAX.
VOLTAGE RATING: 30V AC/DC
DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE
CONTACT RESISTANCE: 40mΩ Max.
INSULATION RESISTANCE: 1000MΩ Min
OPERATING TEMPERATURE: -40°C to +85°C
DURABILITY: 300 CYCLES MIN.



華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL: 886-2-26577778; FAX.886-2-26575659

REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容	SIGN 修改	DATE 日期
A	EXXXX-XXX	△ X 0	-	Jimmy	2020/05/07

UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差		CHECKED 審核	DESIGNED 設計	TITLE 產品名稱
X. ±0.50			Jimmy	SFP CONNECTOR SMT w/Post 20 Pin Au:15u"
.X ±0.30		APPROVED 承認	2020/05/07	UNIT 單位 MM
.XX ±0.20				SCALE 比例 1/1
ANG. ±5'00"				SIZE 尺寸 A4
			DRAWN 製圖	PART NO. 產品料號 D13-C088-02001
			2020/05/07	DOC. NO. 文件編號 CUT-XXXX-XXX
				REV. 版本 A