

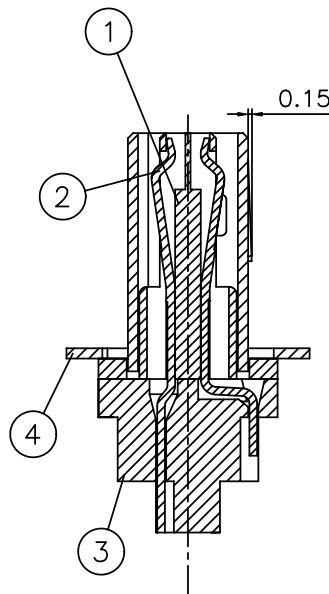
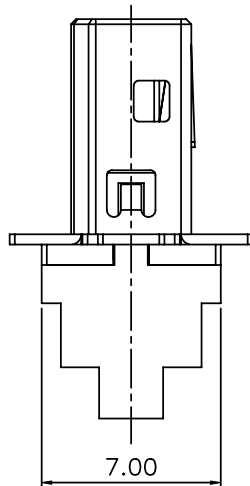
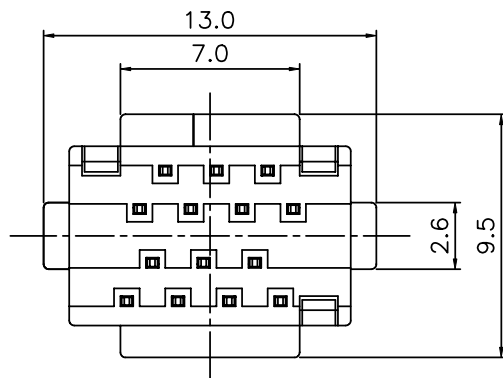
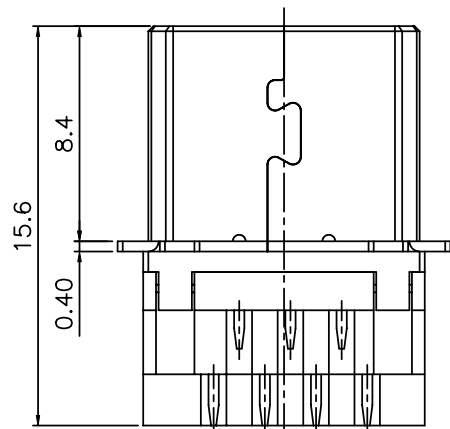
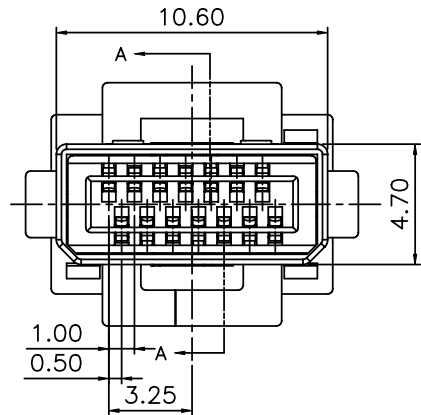


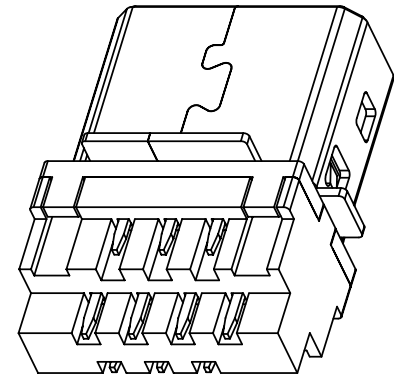


SECTION A-A

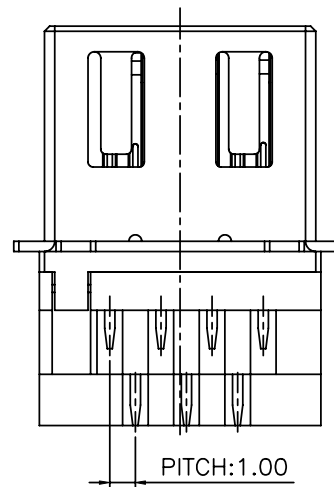

ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	SYNTHETIC REISN	(Black)
2	CONTACT	14	COPPER ALLOY	Gold flash selective lead free
3	BASE	1	SYNTHETIC RESIN	(Black)
4	SHELL	1	COPPER ALLOY	Ni:50~80u"

- NOTES
- 1.MATERIAL: See drawing
 - 2.ELECTRICAL
 - 2.1.Insulator resistance: 1000M ohms Min. @ 250 VDC
 - 2.2.Withstanding voltage: 100 VAC / minute
 - 2.3.Contact resistance: 50m ohms Max.
 - 3.MECHANICAL
 - 3.1.Durability: 5000 cycles Min.
 - 3.2.Contact retention force: 4.2N(0.43kgf) Min
 - 4.PACKING: 500pcs/bag (reference)
 - 5.PART NO.
M30 - 0558 - 0 0 051
SERIES Connector MODEL NO. 0558 TYPE NO. 051=Type 51 PROCESS NO. "0" MATERIAL TYPE 0=Semi-finished goods



WALTA 華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL:886-2-26577778;FAX:886-2-226575659

D	E1208-018	△ X 0	修改機構	Zhaohua	2012/08/21	UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差	CHECKED 審核	DESIGNED 設計 TONY 04/02/01"	TITLE 產品名稱 CONNECTOR (Pitch:0.5mm) UNIT 單位 MM SCALE 比例 1/1 SIZE 尺寸 A4		PART NO. 產品料號 M30-0558-00051 DOC. NO. 文件編號 CUT-0558-009		REV. 版本 D
C	EXXX-XXX	△ X 0	--	LON	01/27/07'	X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±5°00'	APPROVED 承認	DRAWN 製圖 SAM 04/05/04"	1/2		1/2		
B	EXXX-XXX	△ X 2	新系統料號變更	LON	01/27/07'								
REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容	SIGN 修改	DATE 日期								
1													
2													
3													
4													
5													
6													
7													
8													
9													
10													

