
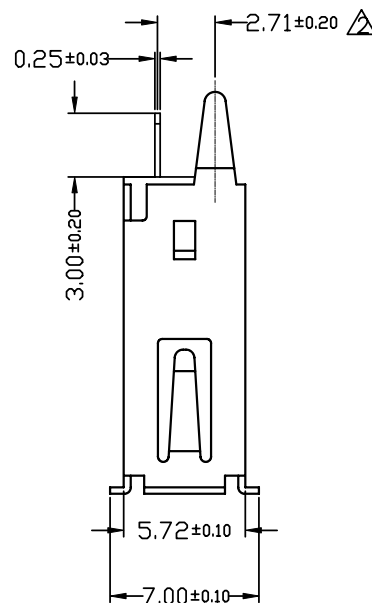
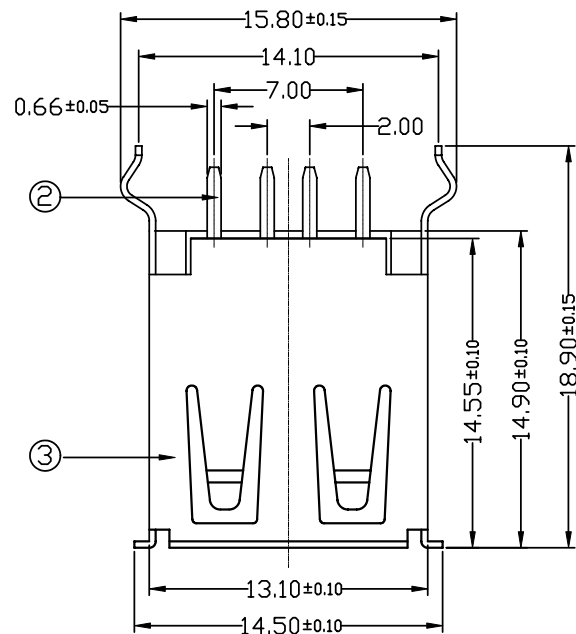



3	SHELL	C2680	T=0.30	Ni:80U"	1
2	TERMINAL	C5191	T=0.25	Sn:100U"; Au:30U"	4
1	HOUSING	PBT	—	ORANGE (UL94-V0)	1
NO.	PART NAME	MATERIAL	THICK	FINISH	Q'TY

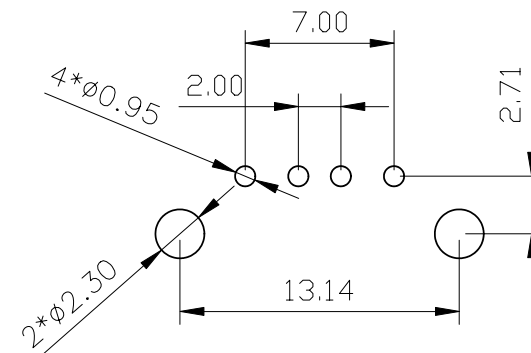

PCB LAYOUT
(TOLERANCE: ±0.05mm)

SPECIFICATIONS:
 Rating current: (1.4PIN) 2.5Amperes. (2.3PIN) 1.5Amperes.
 DIELECTRIC Withstanding Voltage: AC 500V.
 Insulation resistance: 1000MΩ Minimum.
 Contact Resistance: 30mΩ Maximum.
 operating Temperature: -55℃ to +85℃.
 MECHANICAL CHARACTERISTICS:
 Mating Force: 3.5Kg. Maximum.
 Unmating Force: 1kg. Minimum.
 durability: 1500 cycles.
 Major DIM: Δ
 PART NO.

SERIES U 18 - C 025 - 004 07
 USB Connector
 CONN TYPE NO.
 18=type 18
 FORM OF FACTORY
 C=Connector of factory
 TYPE NO.
 07=Type 07
 CONTACT NUMBER
 004=04 position
 FACTORY CODE



WALTA 華大電子股份有限公司
 WALTA ELECTRONIC CO.,LTD.
 TEL:886-2-26577778; FAX:886-2-26575659

B	E1802-001	△ X 1	修改鐵殼腳中心尺寸公差	TANG	2018/2/1	UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差	CHECKED 審核	DESIGNED 設計 Lonlon 2017/2/7	UNIT 單位 MM	TITLE 產品名稱 USB 4PIN-AF-180度插板全包式
A	E1702-001	△ X 0	-	Lonlon	2017/2/7	.X ±0.50 .XX ±0.30 ANG. ±5'00'	APPROVED 承認	DRAWN 製圖 Lonlon 2017/2/7	SCALE 比例 1/1	PART NO. 產品料號 U18-C025-00407
REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容	SIGN 修改	DATE 日期				SIZE 尺寸 A4	DOC. NO. 文件編號 CUT-C025-083

A