


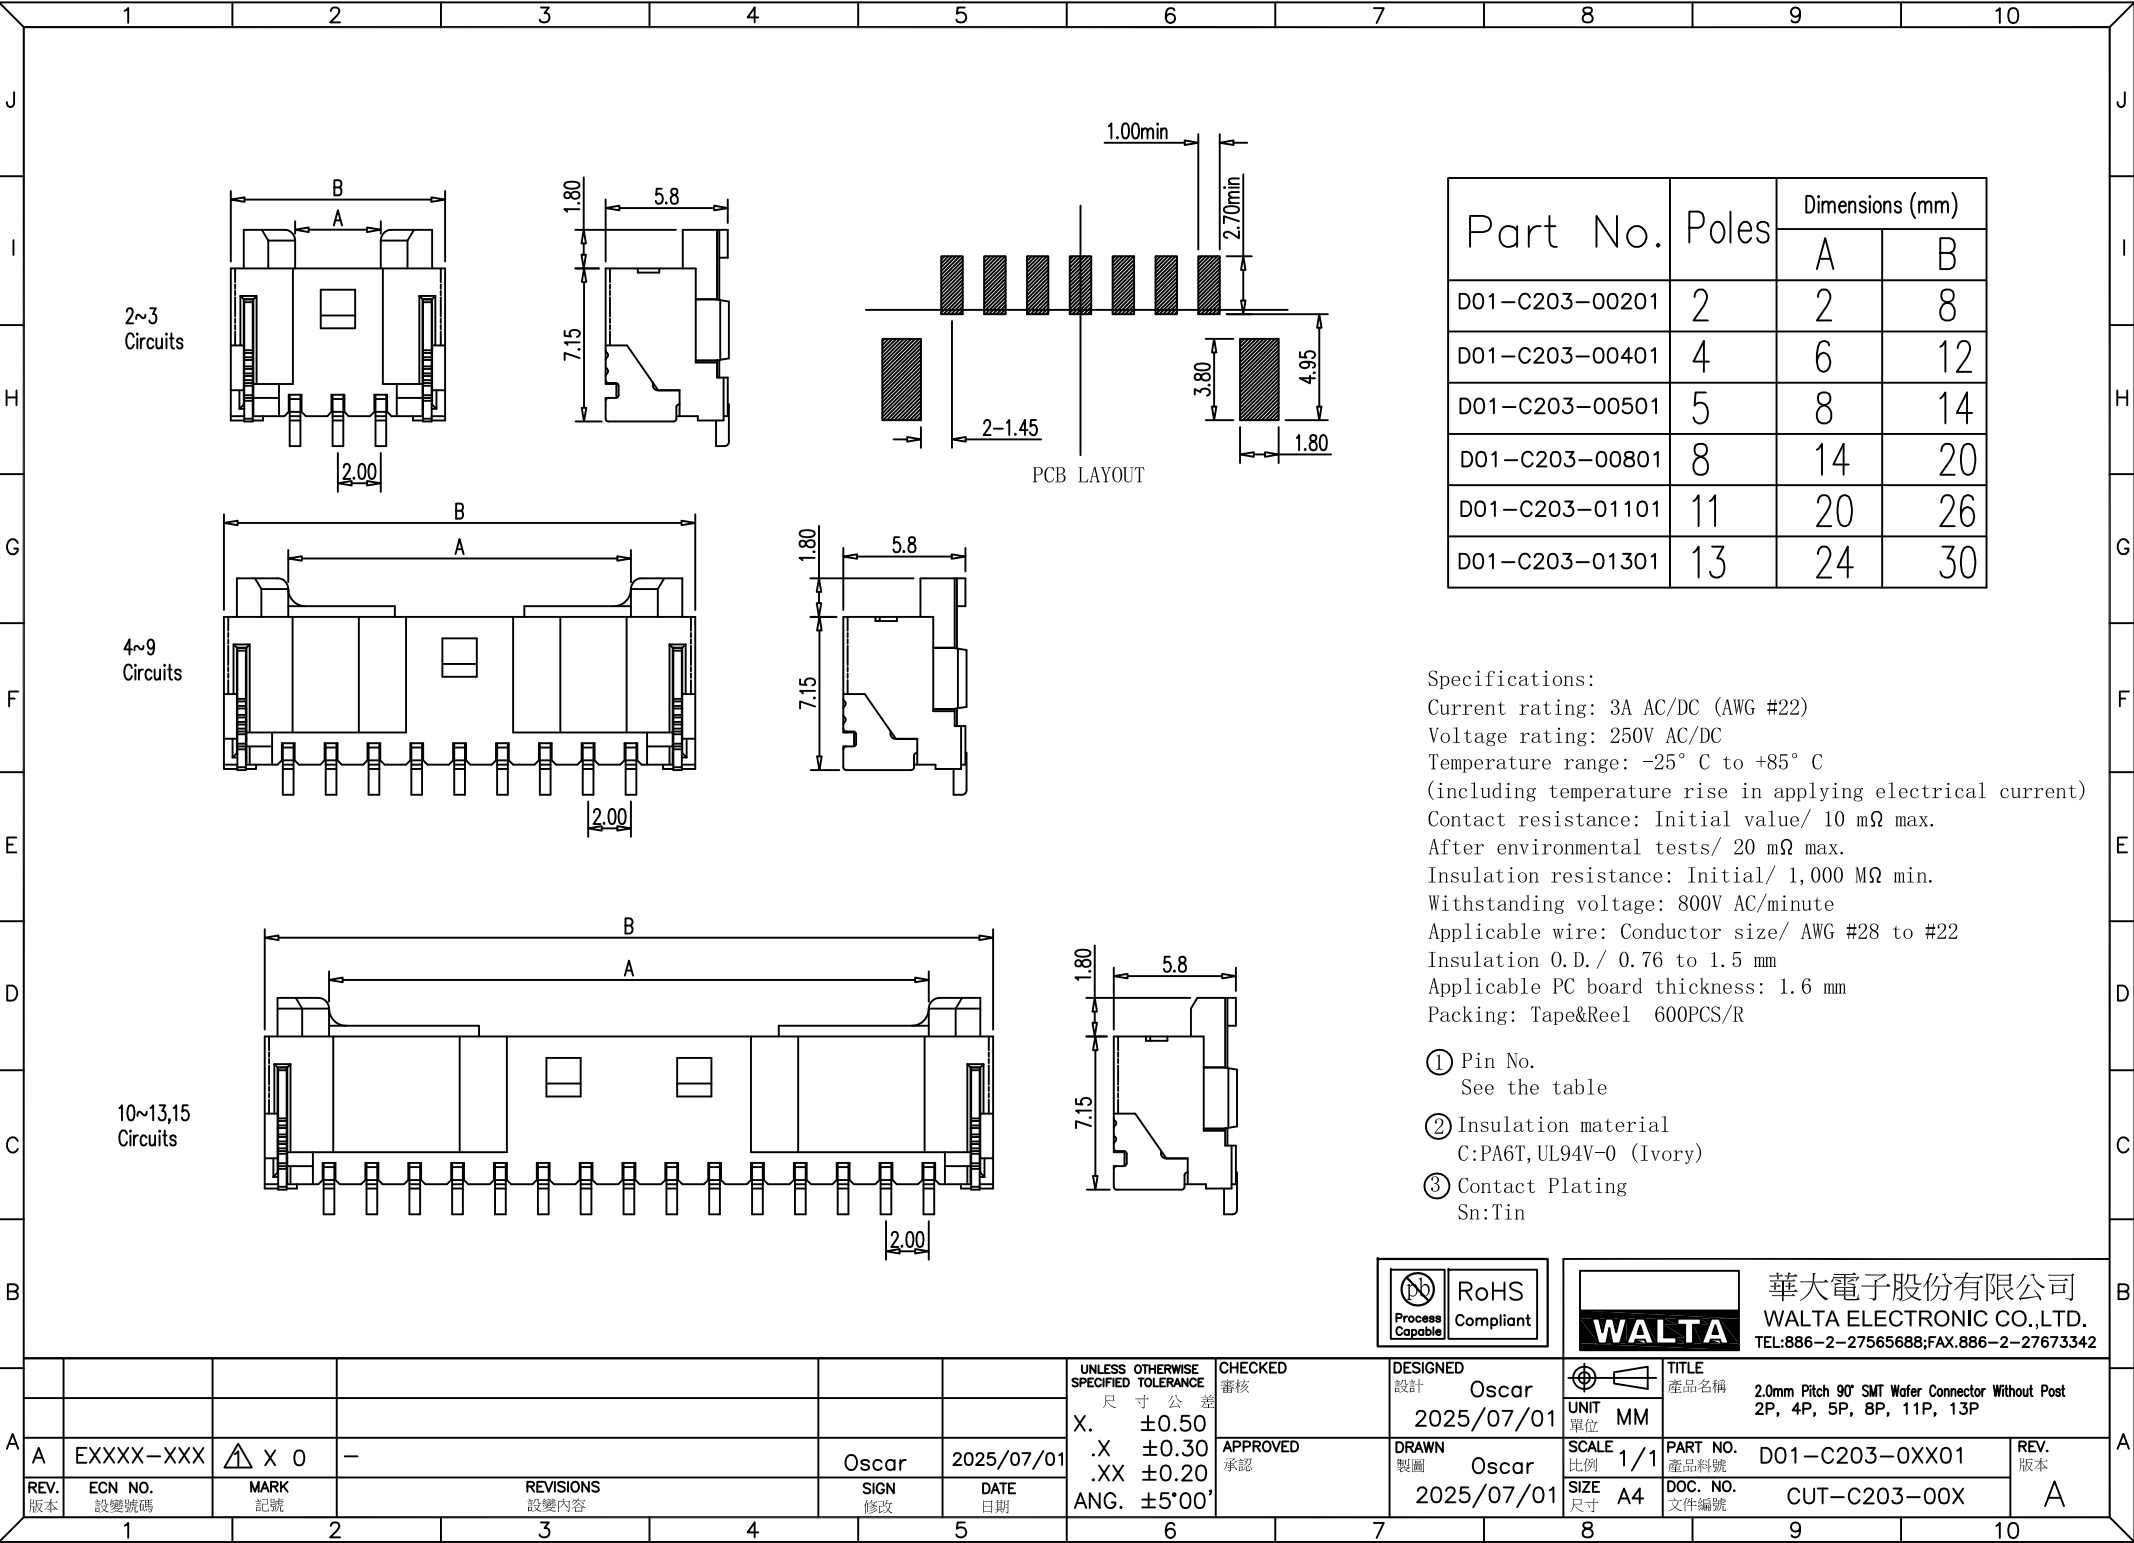

Part No.	Poles	Dimensions (mm)	
		A	B
D01-C203-00201	2	2	8
D01-C203-00401	4	6	12
D01-C203-00501	5	8	14
D01-C203-00801	8	14	20
D01-C203-01101	11	20	26
D01-C203-01301	13	24	30

Specifications:
Current rating: 3A AC/DC (AWG #22)
Voltage rating: 250V AC/DC
Temperature range: -25° C to +85° C
(including temperature rise in applying electrical current)
Contact resistance: Initial value/ 10 mΩ max.
After environmental tests/ 20 mΩ max.
Insulation resistance: Initial/ 1,000 MΩ min.
Withstanding voltage: 800V AC/minute
Applicable wire: Conductor size/ AWG #28 to #22
Insulation O.D./ 0.76 to 1.5 mm
Applicable PC board thickness: 1.6 mm
Packing: Tape&Reel 600PCS/R

- ① Pin No.
See the table
- ② Insulation material
C:PA6T, UL94V-0 (Ivory)
- ③ Contact Plating
Sn:tin

RoHS

Compliant

Process Capable

WALTA

華大電子股份有限公司

WALTA ELECTRONIC CO.,LTD.

TEL:886-2-27565688;FAX:886-2-27673342

DESIGNED 設計 Oscar 2025/07/01	CHECKED 審核	TITLE 產品名稱 2.0mm Pitch 90° SMT Wafer Connector Without Post 2P, 4P, 5P, 8P, 11P, 13P
DRAWN 製圖 Oscar 2025/07/01	APPROVED 承認	PART NO. 產品料號 D01-C203-0XX01
		DOC. NO. 文件編號 CUT-C203-00X
		REV. 版本 A