
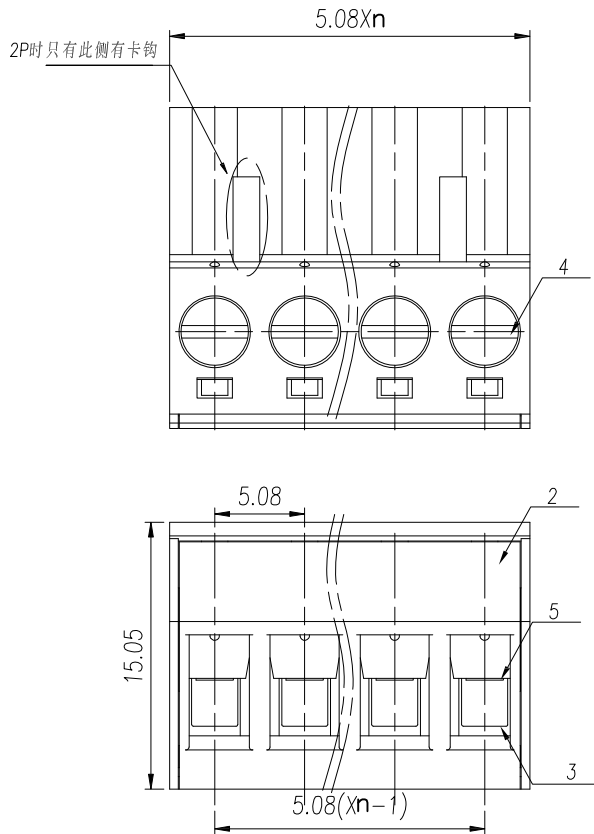


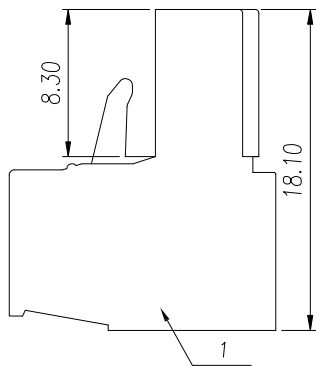

UL/CUL 技术参数					
UL/CUL Technical Data					
等级	Use Group	B	C	D	
额定电压	Rated Voltage	[V]	300	-	300
额定电流	Rated Current	[A]	15	-	10
接线范围	Wire Range	28-12			
单/多芯线	Solid/Stranded				[AWG]
耐电压	Withstanding Voltage	1600V/1Min			
IEC 技术参数					
IEC Technical Data					
过电压类别	Overvoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage	[V]	250	320	630
额定电流	Rated Current	[A]	15	15	15
额定冲击电压	Impulse withstand voltage	[KV]	4.0	4.0	4.0
导线截面积	Conductor cross section	0.2-2.5			
硬质/柔性导线	Solid/ flexible				[mm²]
一般参数 Other Data					
间距	Pitch / 极数 Poles	[mm] / [P]	5.08 / 02~24		
剥线长度	Stripping Length	[mm]	7~8		
螺丝	Screw/ 扭矩 Torque(Max)	[N.m]	M3/0.5		
工作温度	Operating temperature	[°C]	-40~105		
符合RoHS环保要求					

Item	Part No.	Pin No.	n
1	D03-C206-00301	3	3
2	D03-C206-00401	4	4

General Tolerances								— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

5	Clamp	Copper Alloy	Sn Plated
4	Screw	Steel	M3/Zn Plated
3	Cage	Copper Alloy	Ni Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES



華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL: 886-2-27565688; FAX.886-2-27673342

A							UNLESS OTHERWISE SPECIFIED	CHECKED	DESIGNED		TITLE			
							尺寸公差	審核	Oscar		產品名稱			
							X. ±0.50		2025/07/01		UNIT	Terminal Block Plug Screw 3 & 4 Pin		
							.X ±0.30 .XX ±0.20 ANG. ±5°00'	APPROVED			單位	MM		
	A	EXXXX-XXX	 X 0	-		Oscar	2025/07/01	承認	DRAWN		PART NO.	REV.		
	REV.	ECN NO.	MARK	REVISIONS		SIGN	DATE		Oscar		SCALE	D03-C206-00301 & 401	版本	
	版本	設變號碼	記號	設變內容		修改	日期		2025/07/01	1/1	產品料號	A		
	1		2	3	4	5	6	7	8	9	10			
												</		