


NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
①	CABLE	UL1007 24AWG 灰色		
②	HOUSING	2510-8P 米黄色胶壳		
③	TERMINAL	2510 端子镀锡		
④	HOUSING	PH2.0 8P 白色胶壳		
⑤	TERMINAL	PH2.0 端子镀锡		



P1		P2
1	灰	1
2	灰	2
3	灰	3
4	灰	4
5	灰	5
6	灰	6
7	灰	7
8	灰	8

1. 100% OPEN & SHORT TEST
2. CONDUCTIVE RESISTANCE : 5 Ohms MAX
3. INSULATION RESISTANCE : 5M Ohms MIN
- 4.HI-POT: 300V DC/10ms
5. The product is ROHS compliant.

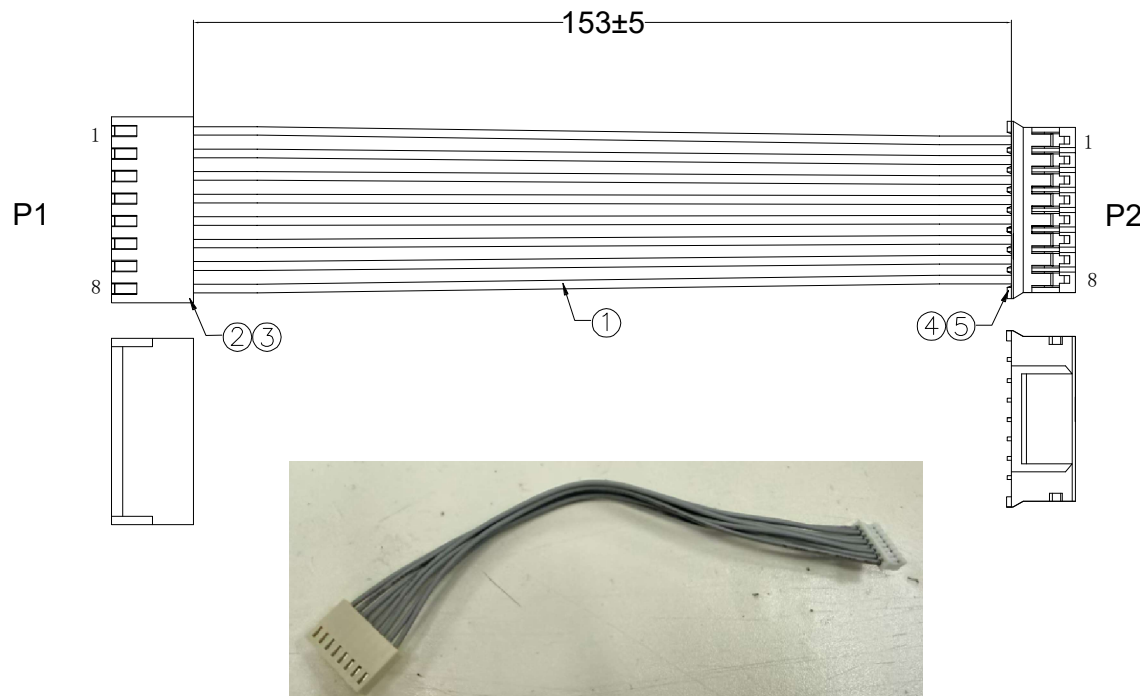

						UNLESS OTHERWISE SPECIFIED 尺寸公差	CHECKED 審核	DESIGNED 設計 Oscar 2023/09/28		TITLE 產品名稱 2510 8P HSG TO PH 2.0 8P HSG 0.153M		
						X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±5'00'	APPROVED 承認	DRAWN 製圖 Oscar 2023/09/28	UNIT 單位 MM SCALE 比例 1/1 SIZE 尺寸 A4	PART NO. 產品料號 A35-W093-00009 DOC. NO. 文件編號 CUT-W093-XXX	REV. 版本 A	
REV. 版本	ECN NO. 設變號碼	MARK 記號	REVISIONS 設變內容			SIGN 修改	DATE 日期					
1	2	3	4	5	6	7	8	9	10			