
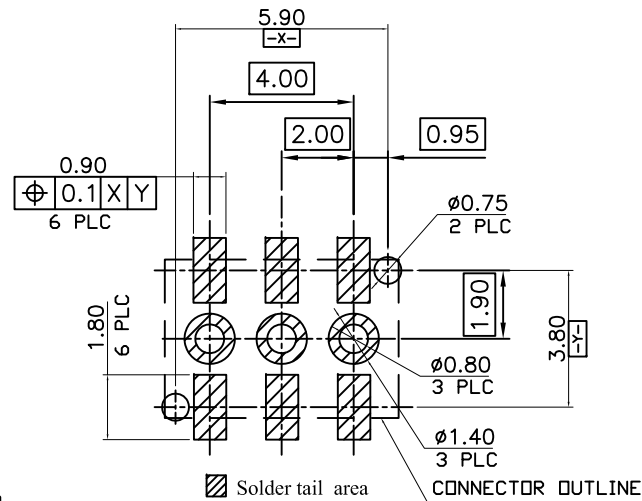
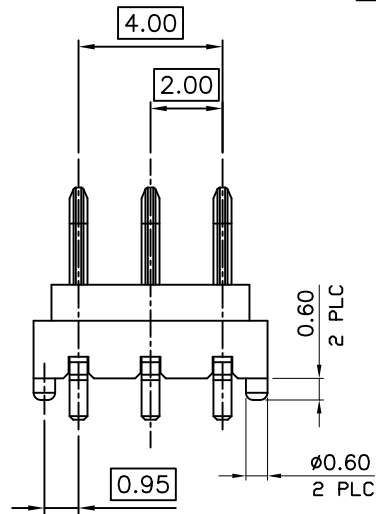
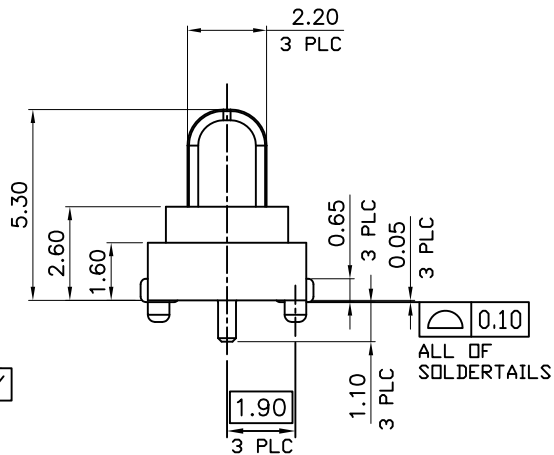

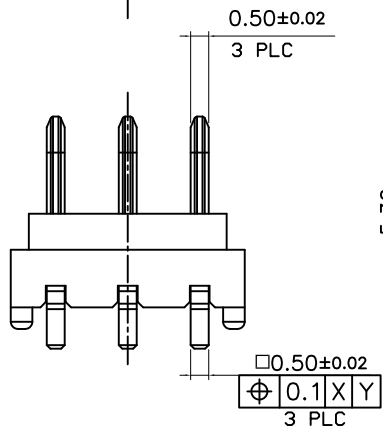


ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	LCP	UL-94V-0 (Black)
2	CONTACT	3	Phosphor Bronze	30u" Gold on contact area, Gold flash on solder tails,

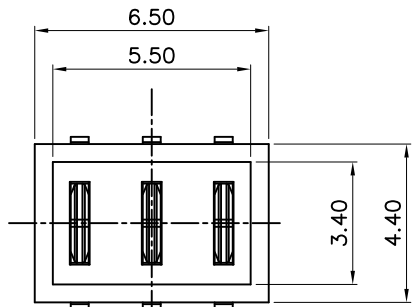


TOLERANCE: ±0.05,
RECOMMENDED PCB LAYOUT
(TOP VIEW)

- NOTES
- 1.MATERIAL: See drawing
 - 2.ELECTRICAL
 - 2.1.Insulator resistance: 1000M ohms Min. @ 500 VDC
 - 2.2.Withstanding voltage: 1K VAC / minute
 - 2.3.Contact resistance: 15m ohms Max.(Initial)
25m ohms Max.(Final)
 - 3.MECHANICAL
 - 3.1.Mating force: 5N(0.5kgf) Max.
 - 3.2.Unmating force: 0.1N(0.01kgf) Min.
 - 3.3.Durability: 10000 cycles Min.
 - 3.4.Contact retention force: 11.76N(1.2kgf) Min
 - 4.PACKING: 500pcs/Reels (reference)
 - 5.PART NO.

SERIES B 0 0 - 0735 - 03 001
B=Twin charger
TYPE 0=other type
CONTACT TYPE 3=OEM&ODM TYPE
MODEL NO. TYPE NO.
001=Type 001
CONTACT NUMBER
03=03position



華大電子股份有限公司
WALTA ELECTRONIC CO.,LTD.
TEL:886-2-27565688;FAX:886-2-27673342

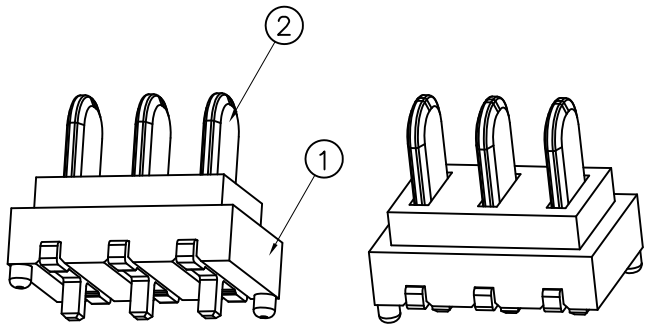

A		E0904-009		X 0		新開發		JIMMY		2008/04/29		UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差		CHECKED 審核		DESIGNED 設計		JIMMY 2008/04/29		TITLE 產品名稱		BATTERY BLOCK CONNECTOR PLUG ASSY 3POS 2MM PITCH (DIP 1.1mm)		UNIT 單位		MM		SCALE 比例		2/1		PART NO. 產品料號		B00-0735-03001		REV. 版本		A	
REV. 版本		ECN NO. 設變號碼		MARK 記號		REVISIONS 設變內容		SIGN 修改		DATE 日期		X. ±0.40		.X ±0.20		.XX ±0.10		ANG. ±2°00'		DRAWN 製圖		JIMMY 2008/04/29		DOC. NO. 文件編號		CUT-0735-003 1/2		SIZE 尺寸		A3		PART NO. 產品料號		B00-0735-03001		REV. 版本		A	

