


ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	LCP E130i+30%G/F	Black(UL-94-V0)
2	CONTACT	19	C2680	BASE NICKEL:50u" GOLD FLASH ON CONTACT AREA 100u" TIN ON SOLDER TAILS
3	SHELL	1	SUS304	50u" NICKEL PLATED OVER ALL








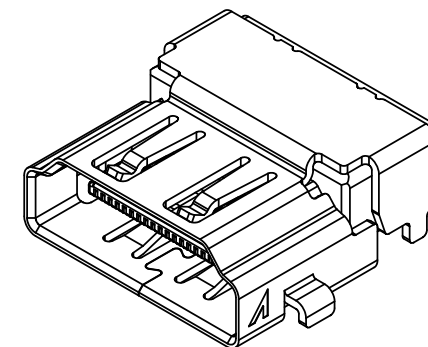


SPECIFICATION
MATERIAL
 See drawing
STANDARD DATA
 Rating current:0.5A
ELECTRICAL
 Insulator resistance: 100 Mohms Min. @ 500 VDC
 Withstanding voltage: 500 VAC/minute
 Contact resistance: 30 mohms Max.
MECHANICAL
 Insertion force: 44.1N(4.5Kgf) Max.
 Withdrawal force: 9.8~39.2N(1.0~4.0Kgf).
 Durability: 10000 cycles Min.
PART NO.
 D13 - 0864 - 19 01 2
 SERIES _____ MODEL NO. _____
 D13=I/O CONNECTOR 0.5mm pitch
 CONTACT TYPE 2=DIP type
 TYPE NO. 01=Type 01
 CONTACT NUMBER 19=19position

		華大電子股份有限公司 WALTA ELECTRONIC CO.,LTD. TEL:886-2-26577778;FAX:886-2-26575659	
--	--	--	--

UNLESS OTHERWISE SPECIFIED TOLERANCE 尺寸公差 .X ±0.25 .XX ±0.15 .XXX±0.10 ANG. ±2°00'	CHECKED 審核	DESIGNED 設計 Lonlon 2020/6/24	 UNIT 單位 MM	TITLE 產品名稱 HDMI 19P REVERSE DIP TYPE		
	APPROVED 承認	DRAWN 製圖 Lonlon 2020/6/24		SCALE 比例 1/1 SIZE 尺寸 A4	PART NO. 產品料號 D13-0864-19012 DOC. NO. 文件編號 CUT-0864-001	REV. 版本 A

UNLESS OTHERWISE
 SPECIFIED TOLERANCE
 尺寸公差
 .X ±0.25
 .XX ±0.15
 .XXX±0.10
 ANG. ±2°00'

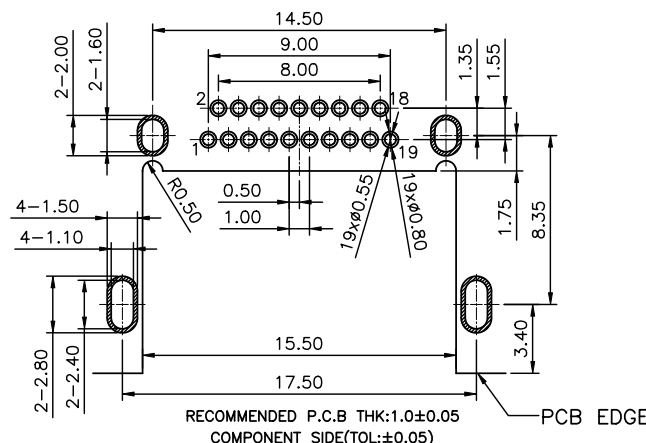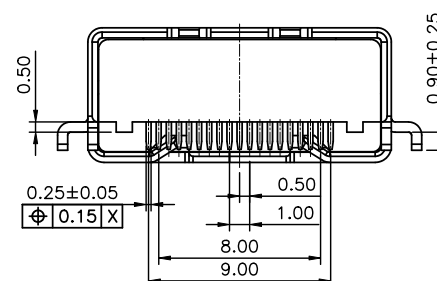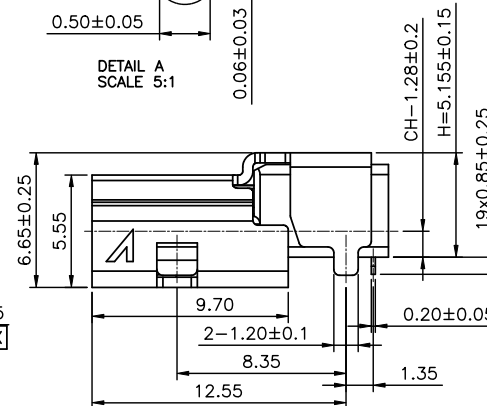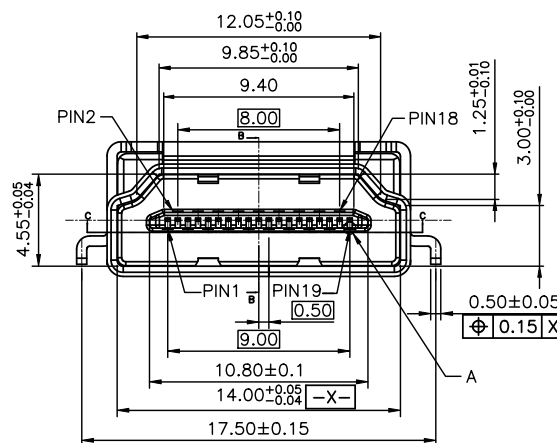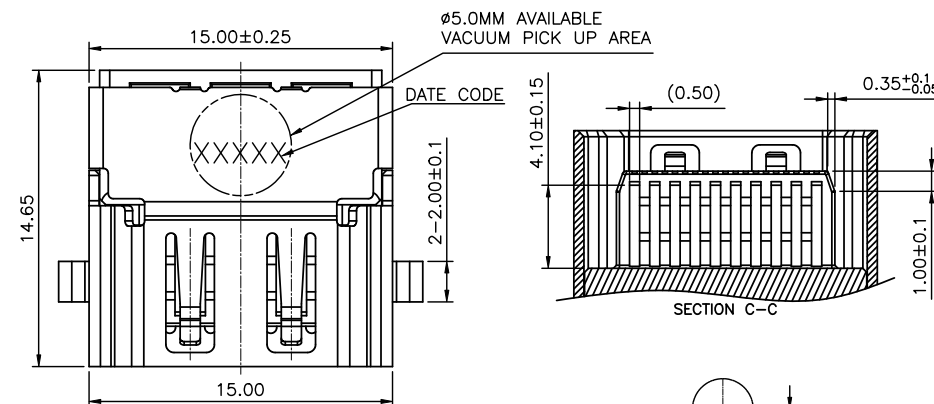

RECOMMENDED P.C.B THK:1.0±0.05
 COMPONENT SIDE(TOL:±0.05)

A		N2020-005				新開		Lonlon		2020/6/24	
REV. 版本		ECN NO. 設變號碼		MARK 記號		REVISIONS 設變內容		SIGN 修改		DATE 日期	

